


IMPORTANT: Ensure the weapon is in a safe operating condition. DO NOT attempt to install the handguard with live ammunition in the vicinity of the weapon. DO NOT install the handguard if it extends past the muzzle; this will result in injury. Lancer Systems will not be held responsible for unintended or misuse of the product.

INSTALLATION:


Installation of the Lancer Lightweight Carbon-Fiber Handguard for the Sig MCX requires the removal of the existing handguard. See Removal Instructions below.

Removal Instructions


1. Disengage the pivot pin located near the front of the receiver.



2. Slide the existing handguard forward and remove it entirely from the weapon.

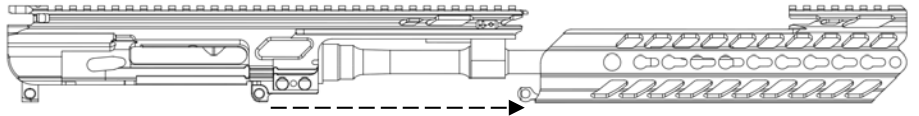


3. Remove the screws attaching the link to the handguard. The link will need to be re-used during assembly.

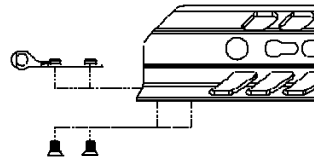


Installation Instructions

1. Apply blue thread locker to the screws supplied with the Lancer handguard.
2. Install the link previously removed onto the Lancer handguard using the screws from Step 1. NOTE: Make sure that the link spacer is installed!

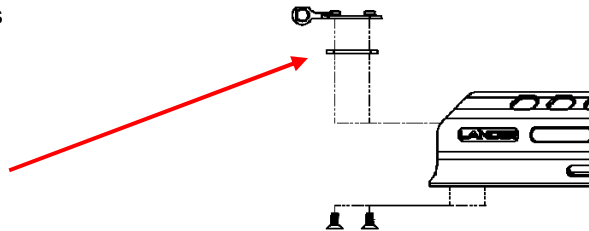

3. Slide the Lancer Carbon Fiber Handguard onto the receiver and reengage the pivot pin.

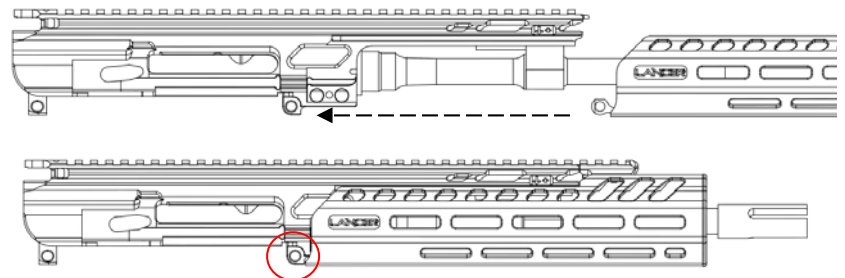

Parts List

Supplied with Handguard

- | | | |
|---------------------------|-------------------------------------|----------------------|
| 1. Carbon Fiber Handguard | 2. Qty. 2 - #8-32 x 5/16 T15 Screws | 3. T15 Short Arm Key |
| 4. Blue Thread Locker | 5. Link Spacer | |